

SANITOR



ULTRA SANITARY, LOW FLOW, VARIABLE PRESSURE TANKWASHER

- **Slow Constant Rotation**
- **No Bearings**
- **Variable Pressure Input**
- **Compact Design**
- **ATEX Exempt & FDA Approved**
- **Improved Cleaning Action**
- **No Maintenance, Longer Life**
- **Flexible & Versatile Operating Parameters**
- **Ideal For Small Vessels/Pipes**
- **Regulatory Compliant**

Versatile & Unique

The Breconcherry Sanitor is ideally suited for applications where a compact, low flow, high sanitary unit is required. The unique design offers flexible operating parameters from 2 bar to 20 bar, with flow rates from 24 l/min. The omission of bearings greatly increases the unit life and prohibits any contamination issues associated with bearing degradation. Additionally this unit offers ATEX exemption and FDA approved materials for a total regulatory compliant package.

Applications

Ideally suited to low flow, variable pressure applications where a slow constant rotation speed is required to give longer chemical dwell times for improved cleaning efficiency. The wide operating pressure band makes the units truly versatile across any industry sector. The units are suitable for cleaning small/medium size vessels and manufacturing equipment. Compact in design, effective in performance, they meet all the essential FDA requirements of hygiene and purity. This makes them highly suitable for the pharmaceutical, and biotech industries as well as food, beverage and other hygiene conscious industries.

Operation

Wash fluid is directed through the three slots on the rotating central barrel, producing three independent strong fan jets giving total coverage. Each fan jet targets a specific area of the vessel. Ideal for burst rinsing or prolonged washing with instant, strong impact performance. The Sanitor is available in 360° wash patterns.

BRECONCHERRY
SELLERSCLEAN

BRECONCHERRY SELLERSCLEAN

International specialists in the design and manufacture of tank cleaning equipment

Australia & New Zealand Distributor:



TECHNICAL PROJECTS

DNL OF MATHI PRODUCTS PTY. LTD A.B.N. 83 090 115 478

4/44 Carrington Road
Castle Hill NSW 2154
Australia

Tel: +61 (0)2 9634 3370

Fax: +61 (0)2 9634 6418

Email: sales@tecpro.com.au

Web: www.tecpro.com.au



We reserve the right to change specification without notice. Whilst we endeavour to provide accurate up to date information, all information is provided as a guide only.

"Breconcherry", "Sanitor" are internationally registered trade marks of Breconcherry Limited.
Copyright © Breconcherry Limited 1999

Maintenance & Inspection

The low wear design requires minimal maintenance. Any spare parts, technical assistance or repair facilities required can be obtained through the global Breconcherry distributor network. As with all mechanical devices, it is recommended that the unit be regularly inspected for correct operation.


Minimum Manhole/Flange Size

The minimum manhole/flange opening size required for unit insertion is 32mm.


Technical Data

Materials of Construction:	Stainless Steel 316, Hastelloy
Max. Operating Temperature:	95° Centigrade
Max. Ambient Temperature:	140° Centigrade
Standard Connections:	3/8" BSP/NPT Female, Pin Fix, Weld Fix
Nozzles Characteristics:	360° Spray Pattern


Flow Rate Verses Pressure

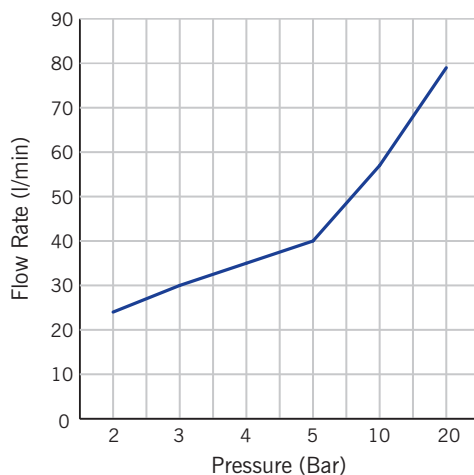

Cleaning / Wetting Radius

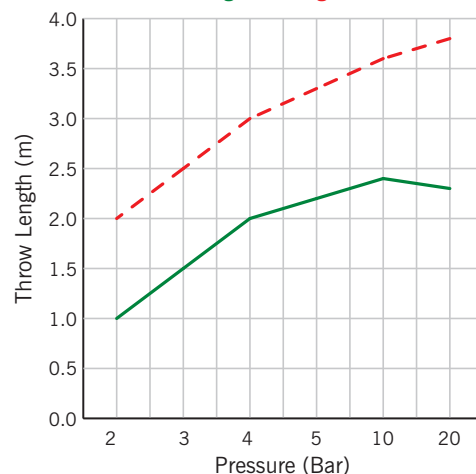

General Arrangement Drawings

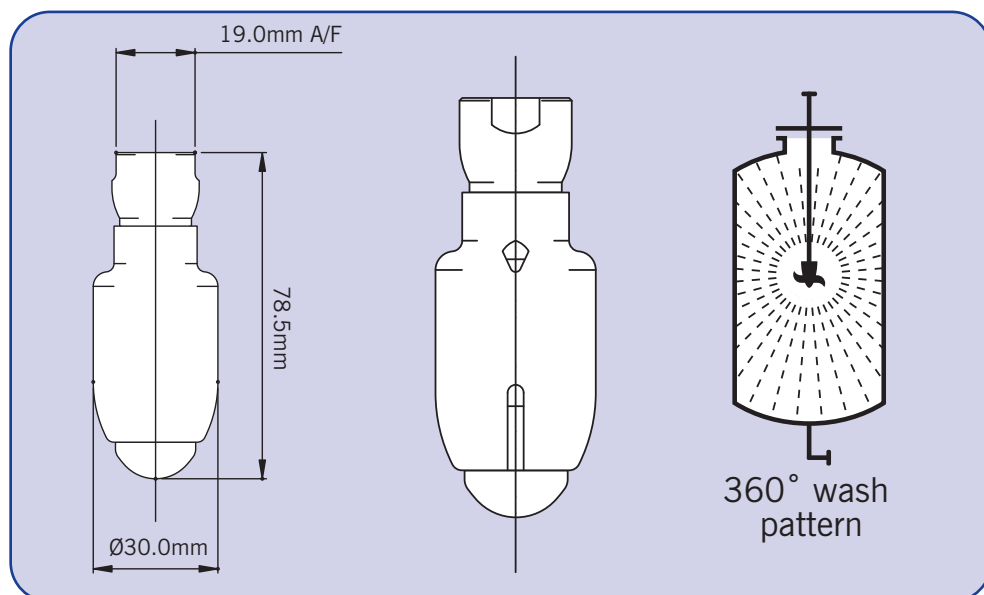

For optimal efficiency use a pre-filter or strainer to prevent particulate clogging.