



THE PERFECT SPRAYHEADS

- High Speed Wash
- Low Flow Rates
- No Ball Bearings
- Single Moving Part
- Reduced Down Time
- Reduced Effluent Costs
- Reduced Contamination
- Low Maintenance

Versatile & Unique

The TURBODISC is the most powerful and economic range of tankwashers in its class. Unique in design, it is ball bearing free and has only one moving part, a rotating disc which instantly converts the wash fluid into a sphere of fast moving droplets. Total surface cover is achieved as fast moving droplets simultaneously cover the entire surface of the tank, inlet pipe and point of entry where contamination frequently occurs.

Applications

The TURBODISC range offers a wide choice of models in 316, 316L stainless steel and Hastelloy C22. They are suitable for cleaning small and medium size process vessels, reactors, driers, granulators, storage tanks, tablet coating machines and IBCs.

Compact in design, effective in performance, they meet all the essential FDA requirements of hygiene and product purity. Used in food, beverage, biotech, pharmaceutical and other hygiene conscious industries their cost effective reliability is recognised worldwide and specified by end users, OEMs and contract design companies. TURBODISC tank washers are ideal for burst rinsing and can be placed into the tank at any angle.

Operation

Wash fluid entering the TURBODISC is directed onto the precision shaped disc. Hydraulic bearings allow the disc to rotate friction free at high speed and the wash fluid is distributed in a dense spray. Performance is instant, impact strong, coverage total. Turbodiscs are supported technically by the Breconcherry global technical network. TURBODISC tankwashers are ideal for burst rinsing and can be placed into the tank at any angle.

BRECONCHERRY SELLERSCLEAN

International specialists in the design and manufacture of tank cleaning equipment

Australia & New Zealand Distributor:



TECHNICAL PROJECTS
D/L OF MATHI PRODUCTS PTY. LTD A.B.N. 83 090 115 478

4/44 Carrington Road
Castle Hill NSW 2154
Australia

Tel: +61 (0)2 9634 3370
Fax: +61 (0)2 9634 6418
Email: sales@tecpro.com.au
Web: www.tecpro.com.au



We reserve the right to change specification without notice. Whilst we endeavour to provide accurate up to date information, all information is provided as a guide only.

"Breconcherry", "Turbodisc" are internationally registered trade marks of Breconcherry Limited.
Copyright © Breconcherry Limited 1999

BRECONCHERRY SELLERSCLEAN


Minimum Manhole/Flange Size

The minimum manhole/flange opening size required for unit insertion will depend on the unit size chosen, but ranges from 30mm to 75mm.


Technical Data

Materials of Construction:	Stainless Steel 316, 316L, Hastelloy, C-PTFE, PTFE, PEEK
Max. Operating Temperature:	95° Centigrade
Max. Ambient Temperature:	140° Centigrade
Standard Connections:	BSP/NPT, Pin Fix
Nozzle Characteristics:	180° or 360° Spray Pattern


Flow Rate Verses Pressure

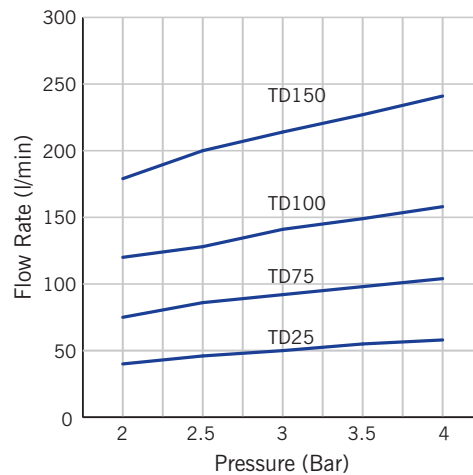

Cleaning / Wetting Radius

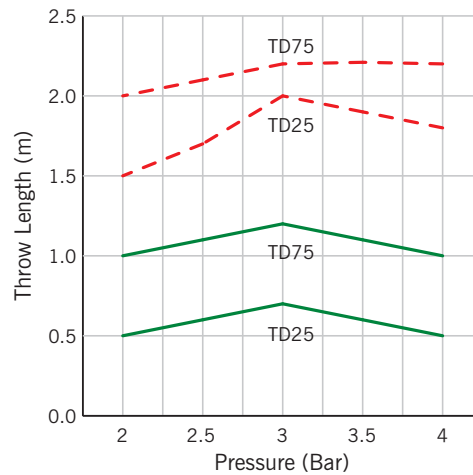

Cleaning / Wetting Radius

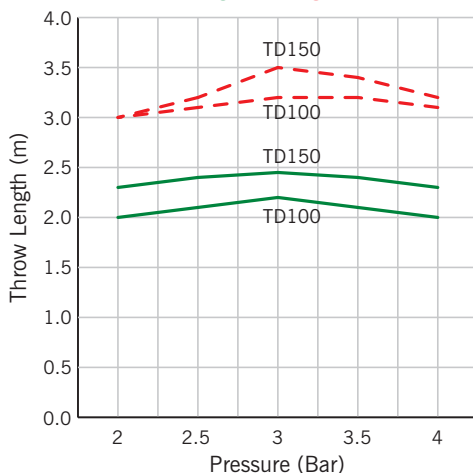

General Arrangement Drawings

