

TURBO SSB



THE PERFECT LOW FLOW, LOW SPEED, SLOTTED SPRAY BALL

- **Slow Constant Rotation** - Improved Cleaning Action
- **No Ball Bearings** - Lower Maintenance, Longer Life
- **Low Flow** - Reduced Water, Chemical & Effluent Costs
- **High Efficiency Fan Jets** - Reduced Cleaning Time

Versatile & Unique

The Breconcherry Turbo SSB takes the popular slotted spray ball format into its next evolutionary phase by removing the ball bearings and slowing the rotation speed down. A unique pressure regulation system in the drive chamber helps to keep the rotation speed consistent under differing pressure. The unit functions with a hydraulic and PTFE bearing system giving the unit an increased lifetime, reducing wear and potentially prohibiting any contamination issues associated with bearing degradation.

Applications

Ideally suited to low flow, variable pressure applications where a slow constant rotation speed is required to give longer chemical dwell times for improved cleaning efficiency. The tried and tested design makes the units truly versatile across any industry sector. The units are suitable for cleaning small/medium size vessels and manufacturing equipment. Compact in design, effective in performance, they meet all the essential FDA requirements of hygiene and purity. This makes them highly suitable for the pharmaceutical, and biotech industries as well as food, beverage and other hygiene conscious industries.

Operation

Wash fluid is directed through the slots on the rotating ball, producing independent strong fan jets giving total coverage. Each fan jet targets a specific area of the vessel. Ideal for burst rinsing or prolonged washing with instant, strong impact performance. The Turbo SSB is available in 180° & 360° wash patterns.

BRECONCHERRY
SELLERSCLEAN

TURBO SSB

BRECONCHERRY SELLERSCLEAN

International specialists in the design and
manufacture of tank cleaning equipment

Australia & New Zealand Distributor:



TECHNICAL PROJECTS

DNL OF MATHI PRODUCTS PTY. LTD A.B.N. 83 090 115 478

4/44 Carrington Road
Castle Hill NSW 2154
Australia

Tel: +61 (0)2 9634 3370
Fax: +61 (0)2 9634 6418
Email: sales@tecpro.com.au
Web: www.tecpro.com.au



We reserve the right to change specification
without notice. Whilst we endeavour to provide
accurate up to date information, all information
is provided as a guide only.

"Breconcherry", "Turbo SSB" are internationally
registered trade marks of Breconcherry Limited.
Copyright © Breconcherry Limited 1999

Maintenance & Inspection



The low wear design requires minimal maintenance. No Spare parts are required. Technical assistance or repair facilities required can be obtained through the global Breconcherry distributor network. As with all mechanical devices, it is recommended that the unit be regularly inspected for correct operation.

Minimum Manhole/Flange Size


The minimum manhole/flange opening size required for unit insertion is 50mm.

Technical Data

Materials of Construction:	Stainless Steel 316, PTFE, C-PTFE, PEEK, Hastelloy
Max. Operating temperature:	95° Centigrade
Max. Ambient Temperature:	140° Centigrade
Standard Connections:	3/4" BSP/NPTFemale, Pin Fix, Weld Fix
Nozzles Characteristics:	180° or 360° Spray Pattern

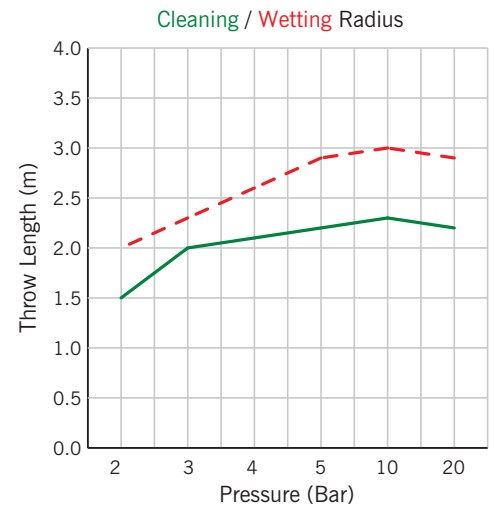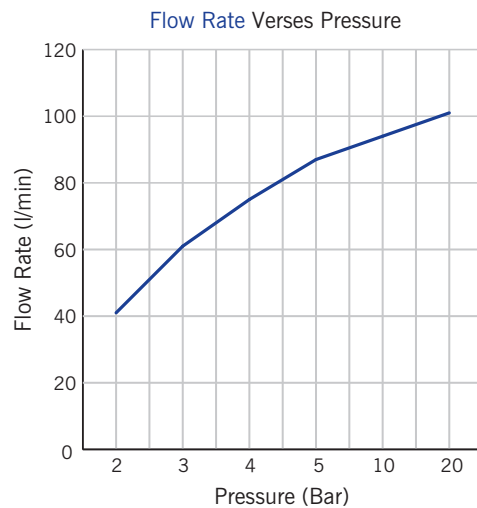

General Arrangement Drawing

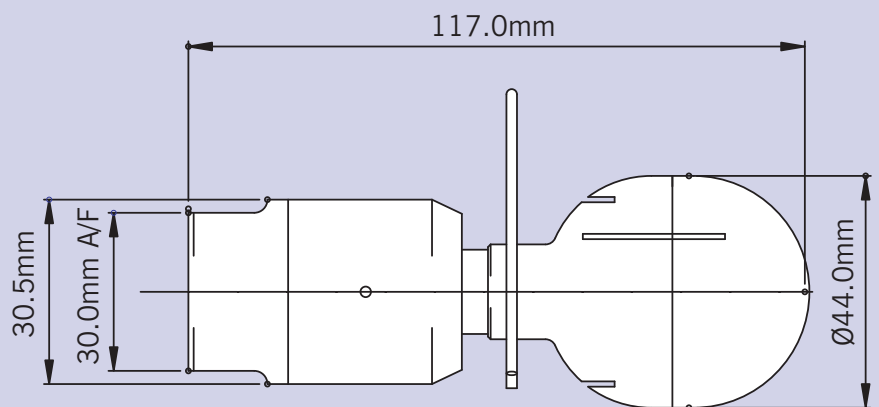

For optimal efficiency use a pre-filter or strainer to prevent particulate clogging.

BRECONCHERRY SELLERSCLEAN

WWW.TECPRO.COM.AU